


VEGO Series – A New Generation of Handling Modules

Lift Gate

VEGO Compact

VEGO BLG 01

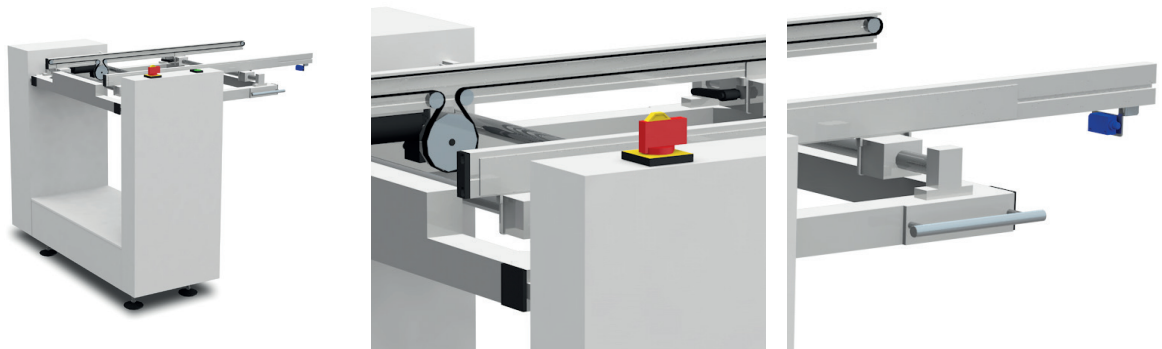

Description


The Lift Gate is a transport conveyor that can create an opening in a production line. The conveyor segment can be hinged open by the operator and has to be closed manually again. The opening is 845 mm wide. The powder coated steel frame ensures process stability and excellent durability.

Features

- _ Start / Stop push button
- _ Walk through
- _ Anti-static conveyor belts
- _ SMEMA Interface

Options

- _ Transport height 850 mm \pm 50 mm
- _ Electrical width adjustment
- _ Adjustable handover speed
- _ Inspection function 0/1
- _ Pneumatic lock

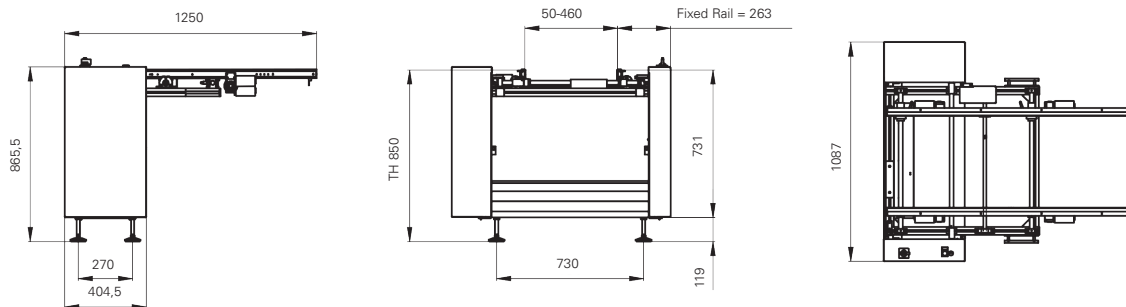

VEGO BLG 01

Machine Configuration

Transport height	950 mm ± 50 mm
Max. transport width	460 mm
Pass through width	845 mm
Interface	SMEMA
Transfer direction	from left to right
Operating side	Front of the machine
Fixed rail	Front of the machine

Panel Dimensions

Panel length	70 to 460 mm
Panel width	50 to 460 mm
Panel thickness	0.8 to 4.5 mm
Component clearance	± 40 mm
Panel weight	to 3 kg

Installation Requirements

Power supply	230 V / 115 V, 50 / 60 Hz, ± 10%
Power supply system	L1 + N + PE
Power consumption	0,14 kW

Machine Description

Length x Width x Height	1250 x 1072 x 966 mm
Netto weight	130 kg
Noise Level	< 75 dB

Upgrades

Control panel T70
 Additional interface protocol
 Automatic width adjustment ^{a)}
 Machine networking via IC Net

a) only with control panel T70

**ASYS
GROUP**

ASYS Automatisierungssysteme GmbH
 Benzstrasse 10,
 89160 Dornstadt, Germany
 Tel (+49) 7348 9855 0
 Fax (+49) 7348 9855 91
 info@asys.de

For more information visit
www.asys-group.com

Subject to change without notice.
 Some general descriptions and performance characteristics may not be applicable to all products. Technical specifications are subject to change without notice. Only features and technical data provided in purchasing contract are legally binding.

Printed in Germany