

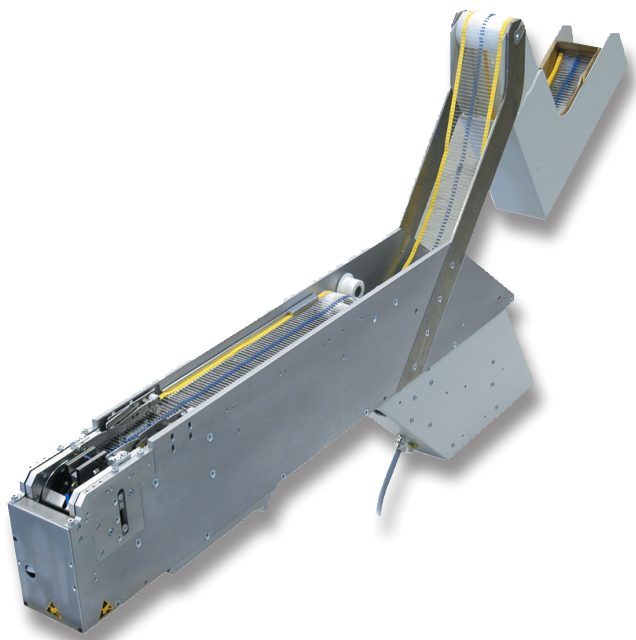
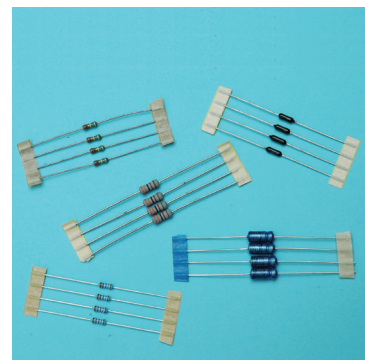


ATF Axial Tape Feeder

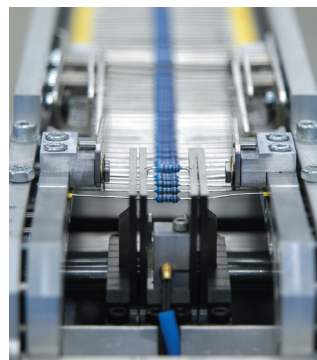

- Efficient and productive feeding
- Integrated lead cutting and bending unit
- Wide component range
- Easy readjustment
- Excellent price-performance ratio
- Intelligent communication with placement system
- Easy user interface
- Fits all OFP-equipment

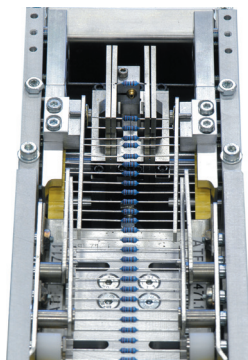

ATF

Axial Tape Feeder

Process Specification		
	ATF	ATF XL
Cycle Time per Component:	< 0,8 sec (5 mm tape pitch)	
Tape Norm:	DIN IEC 286 and EIA296	
Tape Width:	63 - 67 mm	78 - 97 mm
Component Dimensions:	Max. Ø 12 mm, 15 mm length	Max. Ø 12 mm, 30 mm length
Standard Grid:	12 - 20 mm	12 - 35 mm
Leads Diameter:	0,4 - 0,8 mm Round, Oval or Square	
Lead Cutting:	0°	
Reel Diameter:	Max. 400 mm or optional Ammo Pack	
Pick Position Repeatability:	± 50 µ	
Technical Specification		
Electrical Power:	24 V	
Compressed air:	6 - 20% bar, according to DIN ISO 8573 3.4.5	
Color:	Blank Anodized	
Outside Dimension (L x D x H):	90 x 1.060 x 392 mm (excl. compon	120 x 1.060 x 392 mm (excl. compon
Interface:	IPTE	
Standards:	CE	
Options		
Tape cutter		
Component contacting tool		
'Feeder almost empty' detection		
Splice tool		
Reel paper separator		
Ammo pack holder		
Reel clamping system		
Software download cable		
Mechanical interface for EasyMounter		
Mechanical and electrical interface for EasyMounter		

■ IPTE
Geleenlaan 5
3600 Genk
Belgium
Tel: +32 (0)89 623 000
Fax: +32 (0)89 623 010
Email: info@ipte.com

■ IPTE Sales
Detailed information on our
worldwide sales offices can
be found on our website at
www.ipte.com

WWW.IPTE.COM